


Dry Containers

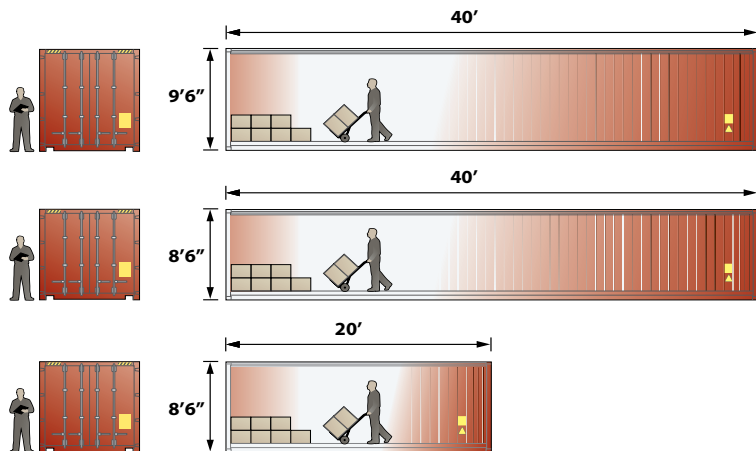

Our high-quality steel dry container storage units are ready for your time-critical requirements.

This specification is a general description of sample Dry Container steel units in Seacastle Container Leasing's fleet. Specifications will vary according to external cladding and by manufacturer and are subject to change.

Contact Sales

North America
San Ramon, CA 1 925 480 3000

South America
Brazil + 55 41 3302 0730

Asia Pacific
Hong Kong + 852 2620 5620
Singapore + 65 6372 9900

Europe
Netherlands + 31 1642 71060

	20' STANDARD 20' x 8'-0" x 8'-6"		40' STANDARD 40' x 8'-0" x 8'-6"		40' HIGH CUBE 40' x 8'-0" x 9'-6"	
	kg	lb	kg	lb	kg	lb
RATING						
Tare Weight	2,200	4,850	3,640	8,030	3,820	8,420
Payload	28,280	62,350	28,860	63,620	28,680	63,230
MGW	30,480	67,200	34,500	71,650	32,500	71,650
EXTERNAL DIMENSIONS	mm	ft-in	mm	ft-in	mm	ft-in
Length	6,058	20'-0"	12,192	40'-0"	12,192	40'-0"
Width	2,438	8'-0"	2,438	8'-0"	2,438	8'-0"
Height	2,591	8'-6"	2,591	8'-6"	2,896	9'-6"
INTERNAL DIMENSIONS	mm	ft-in	mm	ft-in	mm	ft-in
Length	5,898	19'-4"	12,032	39'-6"	12,032	39'-6"
Width	2,352	7'-8"	2,352	7'-8"	2,352	7'-8"
Height	2,393	7'-10"	2,393	7'-10"	2,698	8'-10"
DOOR OPENING	mm	ft-in	mm	ft-in	mm	ft-in
Width	2,340	7'-8"	2,340	7'-8"	2,340	7'-6"
Height	2,280	7'-5"	2,280	7'-5"	2,585	8'-5"
CUBE	m ³	ft ³	m ³	ft ³	m ³	ft ³
Cubic capacity	33.2	1,170	67.7	2,390	76.4	2,700
GOOSENECK TUNNEL			mm	ft-in	mm	ft-in
Width			3,315	10'-10"	3,315	10'-10"
Height			1,029	3'- 4"	1,029	3'- 4"
Center Distance			120	0'-4"	120	0'-4"
FORK POCKET	mm	ft-in				
Width	360	1' - 2"				
Height	115	0' - 4.5"				
Center Distance	2,080	6' - 9"				